



SHANDONG SANTECK WHEELS CO.,LTD

Email: sgk@sdsanteck.com

锻铝铝合金车轮 Forged Aluminum Alloy Wheel


产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B (mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A1	17.5X6.00	10	26.5	225	176	134	114	14.0	1750	TR543C	8R17.5	
A2		10	32.5	222.25	164	134	114	14.0	1750			
A3		6	26.5	222.25	164	134	114	13.3	1750			
A4		6	32.5	222.25	164	134	114	13.2	1750			
A5		6	32.5 SR22	222.25	164	134	114	13.2	1750			
A6		6	21.5	205	160	134	114	13.4	1750			
A7		5	24	203	146	134	114	13.7	1750			
A8		5	32.5	203	146	134	114	13.6	1750			
A9		5	32.5 SR22	203	146	134	114	13.5	1750			
产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A10	17.5X6.75	6	26.5	245	202	140	120	13.7	2500	TR543C	9R17.5	
A11		6	26.5	225	176	140	120	14.1	2500			
产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A12	19.5X6.75	8	24	275	221	148	126	16.9	2750	TR543C	9R19.5	
A13		8	26.5	275	221	148	126	16.8	2750			
A14		8	32.5	275	221	148	126	16.7	2750			

产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A15	19.5X7.5	8	24	275	221	157	135	17.4	3000	TR543C	10R19.5	
A16		8	26.5	275	221	157	135	17.3	3000			
A17		8	32.5	275	221	157	135	17.2	3000			
A18		10	26.5	285.75	221	157	135	17.1	3000			
产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A19	22.5X7.5	10	26.5	335	281.2	162	138	24.4	3550	70MS-7	10R22.5	 
A20		10	32.5	335	281.2	162	138	24.2	3550			
A21		10	32.5 SR22	335	281.2	162	138	24	3550			
A22		10	26.5	285.75	220	162	138	26.1	3550			
A23		10	32.5	285.75	220	162	138	25.9	3550			
A24		8	32.5 SR22	285	221	162	138	26.2	3550			
A25		8	32.5	275	221	162	138	26.4	3550			
A26		8	32.5 SR22	275	221	162	138	26.2	3550			
产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A27	22.5X8.25	10	26.5	335	281.2	167	142.5	25.9	3650	70MS-7	11R22.5	 
A28		10	32.5	335	281.2	167	142.5	25.7	3650			
A29		10	32.5 SR22	335	281.2	167	142.5	25.5	3650			
A30		10	26.5	285.75	221	169	145	25.3	3650			
A31		10	32.5	285.75	221	169	145	25	3650			
A32		10	32.5 SR22	285.75	221	169	145	24.8	3650			
A33		8	32.5 SR22	285	220	169	145	25.7	3650			
A34		8	32.5 SR22	285	221	169	145	25.7	3650			

产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A35	22.5X9.00	10	26.5	335	281.2	176.5	152	25.8	4125	70MS-7	12R22.5	
A36		10	32.5	335	281.2	176.5	152	25.6	4125			
A37		10	32.5 SR22	335	281.2	176.5	152	25.4	4125			
A38		10	26.5	285.75	221	176.5	152	27.5	4125			
A39		10	32.5	285.75	221	176.5	152	27.3	4125			
A40		10	32.5 SR22	285.75	221	176.5	152	27.1	4125			
A41		10	26.5	285.75	220	176.5	152	27.5	4125			
A42		10	32.5	285.75	220	176.5	152	27.3	4125			
A43		10	32.5 SR22	285.75	220	176.5	152	27.1	4125			
产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A44	22.5X11.75	10	26.5	335	281.2	25	0	24.6	4500	40MS	385/65R22.5	
A45		10	26.5	335	281.2	145	120	24.6	4500			
A46		10	26.5	285.75	220	25	0	26.4	4500			
A47		10	26.5	285.75	220	145	120	26.4	4500			
产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A48	22.5X13.00	10	26.5	335	281.2	14	-14	32.5	5200	40MS	425/65R22.5	
A49		10	26.5	285.75	220	14	-14	34.5	5200			
产品编号 PART NO.	规格 SIZE	螺栓数 PCD HOLES	螺孔直径 STUD HOLE DIA. (mm)	分布圆 P.C.D (mm)	中心孔 C.B(mm)	外偏距 OUTSIDE OFFSET (mm)	内偏距 INSIDE OFFSET (mm)	重量 WEIGHT (kg)	载重 MAXLOAD (KG)	气门嘴 VALVE	配套轮胎 TIRE	图片 PICTURE
A50	24.5X8.25	10	26.5	285.75	220	168	144	29.3	3650	TR544D	285/80R24.5	
A51		10	32.5 SR22	285.75	220	168	144	29.1	3650			

SHANDONG SANTECK WHEELS CO.,LTD

Email: sgk@sdsanteck.com

◆ 16.0X5.5 小型载重卡车轮 Steel Tubeless Wheel										
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B1	5	29	SR22	203.2	146	118/125	10	1450	7.5R16	
B2	5	32	SR22	208	150	118/125	10	1450		
B3	6	32	SR22	222.25	163	125	10	1450		
B4	6	21	1*45	170	130	115	10	1450		
◆ 16.0X6.0 小型载重卡车轮 Steel Tubeless Wheel										
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B5	5	32.5	SR22	203.2	146	125	10	1450	7.5R16	
B6	6	32.5	SR22	222.25	163	125	10	1450		
◆ 17.5X6.0 小型载重卡车轮 Steel Tubeless Wheel										
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B7	5	29	1*45	203.2	146	130	10/12	1850	8R17.5	
B8	5	32.5	SR22	203.2	146	130	10/12	1850		
B9	5	32.5	SR22	208	150	130	10/12	1850		
B10	6	21	1*45	205	161	130	10/12	1850		
B11	6	20.5	SR22	190	140	130	10/12	1850		
B12	6	32.5	SR22	222.25	164	130	10/12	1850		
B13	10	26	1*45	225	176	130	10/12	1850		
◆ 17.5X6.75 载重卡车轮 Steel Tubeless Wheel										
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE

B14	5	29	1*45	203.2	146	140	10/12	2350	9R17.5	
B15	5	32.5	SR22	208	150	140	10/12	2350		
B16	6	20.5	SR22	190	140	140	10/12	2350		
B17	6	21	1*45	205	161	140	10/12	2350		
B18	6	32.5	SR22	222.25	164	140	10/12	2350		
B19	8	26	1*45	275	221	140	10/12	2350		
B20	10	26	1*45	225	176	140	10/12	2350		
◆	19.5X6.75 载重卡车轮 Steel Tubeless Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B21	6	32.5	SR22	222.25	164	140	12	2350	9R19.5	
B22	8	26	1*45	275	221	140	12	2350		
B23	8	26	1*45	275	214	140	12	2350		
B24	8	32.5	SR22	285	221	140	12	2350		
B25	10	26	1*45	225	176	140	12	2350		
◆	19.5X7.5 载重卡车轮 Steel Tubeless Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B26	6	21	1*45	205	161	145	12	2550	10R19.5	
B27	8	26	1*45	275	221	145	12	2550		
B28	8	26	1*45	275	214	145	12	2550		
B29	8	32.5	SR22	285	221	145	12	2550		
B30	10	26	1*45	225	176	145	12	2550		
B31	10	26	1*45	285.75	220	145	12	2550		
◆	22.5X6.00 载重卡车轮 Steel Tubeless Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE

B32	6	20.5	1*45	190	140	145	12	2800	8R22.5	
B33	6	32.5	SR22	222.25	164	145	12	2800		
B34	8	32.5	SR22	275	214	145	12	2800		
B35	8	32.5	SR22	285	221	145	12	2800		
B36	10	26	1*45	225	176	145	12	2800		



22.5X6.75 载重卡车轮 Steel Tubeless Wheel

产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B37	8	26	1*45	275	221	152	14	2800	9R22.5	
B38	8	26	1*45	275	214	152	14	2800		
B39	8	32.5	SR22	285	221	152	14	2800		
B40	8	32.5	SR22	275	214	152	14	2800		
B41	10	26	1*45	335	281	156	14	2800		
B42	10	26	1*45	285.75	220	152	14	2800		
B43	10	32	SR22	285.75	222	152	14	2800		



22.5X7.5 载重卡车轮 Steel Tubeless Wheel

产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B44	8	26	1*45	275	221	165	14	3000	10R22.5	
B45	8	26	1*45	275	214	165	14	3000		
B46	8	32.5	SR22	285	221	165	14	3000		
B47	8	32.5	SR22	275	214	165	14	3000		
B48	8	32.5	SR22	285	221	110	14	3000		
B49	10	26	1*45	335	281	165	14	3000		
B50	10	26	1*45	285.75	220	165	14	3000		
B51	10	32.5	SR22	285.75	222	165	14	3000		
B52	10	26	1*45	335	281	110	14	3000		
B53	demountable rim					110	7	3000		


◆ 22.5X8.25 载重卡车轮 Steel Tubeless Wheel												
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE		
B54	8	26	1*45	275	214	169	14	3600	11R22.5			
B55	8	26	1*45	275	221	169	14	3600				
B56	8	32.5	SR22	285	221	169	14	3600				
B57	8	32.5	SR22	285	221	110	14	3600				
B58	8	32.5	SR22	275	214	169	14	3600				
B59	10	26	1*45	335	281	169	14	3600				
B60	10	26	1*45	335	281	110	14	3600				
B61	10	26	1*45	285.75	220	169	14	3600				
B62	10	32.5	SR22	285.75	222	169	14	3600				
B63	demountable rim					120	7	3600				
◆ 22.5X9.00 载重卡车轮 Steel Tubeless Wheel												
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE		
B64	8	32.5	SR22	285	221	175	14	4250	12R22.5			
B65	8	32.5	SR22	285	221	117	14	4250				
B66	8	32.5	SR22	275	214	175	14	4250				
B67	10	26	1*45	335	281	175	14	4250				
B68	10	26	1*45	335	281	117	14	4250				
B69	10	26	1*45	285.75	220	175	14	4250				
B70	10	32.5	SR22	285.75	222	175	14	4250				
B71	demountable rim					130	7	4250				
◆ 22.5X9.75 载重卡车轮 Steel Tubeless Wheel												
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE		

B72	8	32.5	SR22	285	221	180	14	4250	13R22.5	
B73	10	26	1*45	335	281	180	14	4250		
B74	10	26	1*45	285.75	220	180	14	4250		
B75	10	32.5	SR22	285.75	222	180	14	4250		
◆	22.5X11.75 载重卡车轮 Steel Tubeless Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B76	8	26	1*45	275	221	0	14	3750	15R22.5	
B77	8	26	1*45	275	221	120	14	3750		
B78	8	32.5	SR22	285	221	0	14	3750		
B79	8	32.5	SR22	285	221	120	14	3750		
B80	10	26	1*45	335	281	0	14	3750		
B81	10	26	1*45	335	281	120	14	3750		
◆	24.5X8.25 载重卡车轮 Steel Tubeless Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆 P.C.D (mm)	中心孔 C.B(mm)	偏距 OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(KG)	配套轮胎 TIRE	图片 PICTURE
B82	8	32.5	SR22	285	221	169	14	3600	11R24.5	
B83	10	26	1*45	335	281	169	14	3750		
B84	10	26	1*45	285.75	220	169	14	3750		
B85	10	32.5	SR22	285	221	169	14	3750		

SHANDONG SANTECK WHEELS CO.,LTD


Email: sgk@sdsantech.com

5.5-16 轻型卡车车轮 Steel Tube Wheel										
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C1	5	29	1*45	203.2	146	127	8/10/12	1550	7.00-16	
C2	5	29	SR22	203.2	146	127	8/10/12	1550		
C3	5	32.5	SR22	203.2	146	127	8/10/12	1550		
C4	5	32.5	SR22	208	150	127	8/10/12	1550		
C5	6	32.5	SR22	222.25	164	127	8/10/12	1550		
C6	6	20.5	SR22	190	140	127	8/10/12	1550		
C7	6	21	1*45	205	161	127	8/10/12	1550		
6.0-16 轻型卡车车轮 Steel Tube Wheel										
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C8	5	29	1*45	203.2	146	130	8/10/12	2000	7.50-16	
C9	5	29	SR22	203.2	146	130	8/10/12	2000		
C10	5	32.5	SR22	203.2	146	130	8/10/12	2000		
C11	5	32.5	SR22	208	150	130	8/10/12	2000		
C12	6	21	1*45	205	161	130	8/10/12	2000		
C13	6	20.5	SR22	190	140	130	8/10/12	2000		
C14	6	32.5	SR22	222.25	164	130	8/10/12	2000		
6.5-16 轻型卡车车轮 Steel Tube Wheel										
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C15	5	29	1*45	203.2	146	140	12/14	2000	8.25-16	
C16	5	29	SR22	203.2	146	140	12/14	2000		
C17	5	32.5	SR22	203.2	146	140	12/14	2000		
C18	5	32.5	SR22	208	150	140	12/14	2000		
C19	6	21	1*45	205	161	140	12/14	2000		

C20	6	20.5	SR22	190	140	140	12/14	2000		
C21	6	32.5	SR22	222.25	164	140	12/14	2000		
◆	6.5-20 重型卡车车轮 Steel Tube Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C22	6	32.5	SR22	222.25	164	145	12/14	2400	8.25-20	
C23	8	26	1*45	275	214	145	12/14	2400		
C24	8	26	1*45	275	221	145	12/14	2400		
C25	8	32.5	SR22	275	214	145	12/14	2400		
C26	8	32.5	SR22	285	221	145	12/14	2400		
C27	10	26	1*45	335	281	145	12/14	2400		
C28	10	26	1*45	285.75	220	145	12/14	2400		
C29	10	32.5	SR22	285.75	222	145	12/14	2400		
◆	7.0-20 重型卡车车轮 Steel Tube Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C30	8	26	1*45	275	214	162	12/14	2800	9.00-20	
C31	8	26	1*45	275	221	162	12/14	2800		
C32	8	32.5	SR22	285	221	162	12/14	2800		
C33	8	32.5	SR22	275	214	162	12/14	2800		
C34	10	26	1*45	335	281	162	12/14	2800		
C35	10	26	1*45	285.75	220	162	12/14	2800		
C36	10	32.5	SR22	285.75	222	162	12/14	2800		
◆	7.5-20 重型卡车车轮 Steel Tube Wheel									
产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C37	8	26	1*45	275	221	165	12/14/16	3200		

C38	8	26	1*45	275	214	165	12/14/16	3200	10.00-20	
C39	8	32.5	SR22	285	221	165	12/14/16	3200		
C40	8	32.5	SR22	275	214	165	12/14/16	3200		
C41	10	26	1*45	335	281	165 / 0	12/14/16	3200		
C42	10	26	1*45	285.75	220	165	12/14/16	3200		
C43	10	32.5	SR22	285.75	222	165	12/14/16	3200		

◆ 8.0-20 重型卡车车轮 Steel Tube Wheel

产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C44	8	26	1*45	275	221	175	14/16	3350	11.00-20	
C45	8	26	1*45	275	214	175	14/16	3350		
C46	8	32.5	SR22	285	221	175	14/16	3350		
C47	8	32.5	SR22	275	214	175	14/16	3350		
C48	10	26	1*45	335	281	175	14/16	3350		
C49	10	26	1*45	285.75	220	175	14/16	3350		
C50	10	32.5	SR22	285.75	222	175	14/16	3350		

◆ 8.5-20 重型卡车车轮 Steel Tube Wheel

产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C51	8	26	1*45	275	214	175	12/14/16	3800	12.00-20	
C52	8	26	1*45	275	221	175	12/14/16	3800		
C53	8	32.5	SR22	285	221	175	12/14/16	3800		
C54	8	32.5	SR22	275	214	175	12/14/16	3800		
C55	10	26	1*45	335	281	175	12/14/16	3800		
C56	10	26	1*45	285.75	220	175	12/14/16	3800		
C57	10	32.5	SR22	285.75	222	175	12/14/16	3800		


◆ 9.0-20 重型卡车车轮 Steel Tube Wheel

产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C58	8	32	SR22	285	221	180	16	3900	12.00-20	
C59	10	26	1*45	335	281	180	16	3900		
C60	10	26	1*45	285.75	220	180	16	3900		
C61	10	32.5	SR22	285.75	222	180	16	3900		

◆

8.5-24 重型卡车车轮 Steel Tube Wheel

产品编号 PART NO.	螺孔数BOLT HOLE QTY.	螺孔直径 BOLT HOLE DIA. (mm)	螺孔形状 BOLT HOLE TYPE	分布圆P.C.D (mm)	中心孔 C.B(mm)	偏距OFFSET (mm)	厚度 (mm)	载重 MAXLOAD(K G)	配套轮胎 TIRE	图片 PICTURE
C62	10	26	1*45	335	281	185	12/14/16	4100	12.00-24	
C63	10	26	SR18	335	281	185	12/14/16	4100		

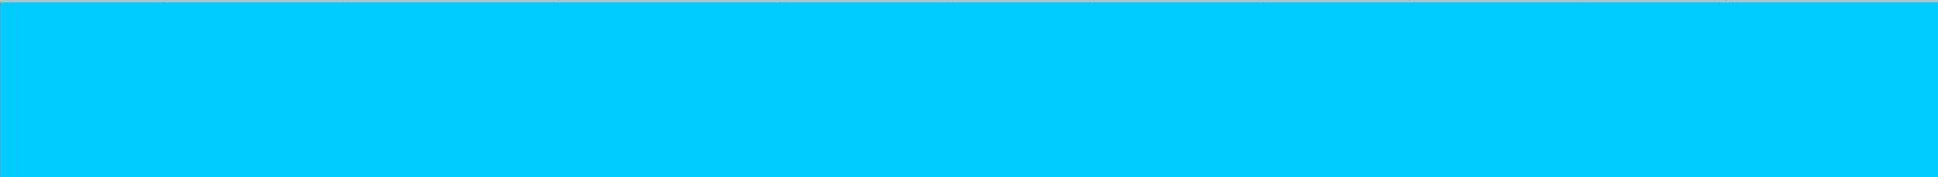

ENGINEERING MACHINERY



FORKLIFT WHEELS

NO.	Wheel Size	Tyre Size
1	6.5-10	23×9-10
2	6.5-10	23×9-10
3	8.0×12	27×9-12
4	6.00Gs-15	7.50-15
5	6.50-15	8.25-15
6	6.50-15	8.25-15
7	6.50-15	8.25-15
8	6.50-15	8.25-15
9	6.50-15	8.25-15
10	6.50-15	8.25-15
11	6.50-15	8.25-15
12	6.50-15	8.25-15
13	7.00T-15	28×9-15
14	7.00T-15	28×9-15

NO.	Wheel Size	Tyre Size
15	7.00T-15	28×9-15
16	7.00T-15	28×9-15
17	8.00V-15	300-15
18	6.50-20	8.25-20
19	6.50-20	8.25-20
20	7.00T-20	9.00-20
21	8.50-20	12.00-20
22	8.50-20	12.00-20
23	9.00-15	315/70-15
24	9.75-15	355/65-15
25	10.00-20	14.00-20
26	10.00-24	14.00-24
27	11.00-15	22×13-15
28	11.00-20	15.00-20

PORT MACHINERY

NO.	Wheel Size	Tyre Size	Structure
1	25-10.00/2.0	14.00-25	3pcs
2	25-10.00/2.0TL	14.00-25	3pcs
3	25-11.25/2.0	16.00-25	3pcs
4	25-11.25/2.0	16.00-25	5pcs
5	25-13.00/2.5	18.00-25	5pcs
6	25-15.00/3.0TL	21.00-25	5pcs
7	33-13.00/2.5TL	18.00-33	5pcs
8	35-15.00/3.0TL	18.00-35	5pcs
9	35-17.00/3.5TL	21.00-35	5pcs



LOADER SERIES



NO.	Wheel Size	Tyre Size	Structure
1	24.00-11.75	16.00-24	3pcs
2	25-14.00/1.5	17.5-25	3pcs
3	25-13.00/2.5	18.00-25	3pcs
4	25-17.00/2.0	20.5-25	3pcs
5	25-15.00/3.0	21.00-25	5pcs
6	25-19.50/2.5	23.5-25	3pcs
7	25-22.00/3.0	26.5-25	5pcs
8	25-24.00/3.0	30.0-25	5pcs
9	29-25.00/3.5	29.5-29	5pcs

MINING CAR SERIES

NO.	Wheel Size	Tyre Size	Structure
1	15-9.75/1.5	355/65-15	3pcs
2	20-10.00/1.7	14.00-20	3pcs
3	24-10.00/2.0	14.00-24	3pcs
4	25-10.00/2.0	14.00-25	5pcs
5	25-11.25/2.0	16.00-25	5pcs
6	25-13.00/2.0	18.00-25	5pcs
7	26-19.5/2.5	23.5-25	5pcs
8	27-23.5/2.5	57×25-27	5pcs
9	29-17.00/3.5	24.0-29	5pcs
10	26-22.00/3.0	26.5-29	5pcs
11	29-25.00/3.5	29.5-29	5pcs
12	33-13.00/3.5	18.00-33	5pcs
13	34-16.00/1.5	55×19.00-34	5pcs
14	35-15.0/3.5	21.00-35	5pcs
15	35-17.00/3.5	24.00-35	5pcs
16	49-19.50/4.0	27.00-49	5pcs
17	51-26.00/5.0	36.00-51	5pcs
18	57-47.00/5.0	60/85-57	5pcs
19	63-41.00/5.0	41.00-63	5pcs

